

FULL OR LOW, LEVALERT LETS YOU KNOW.

BRAND

In one quick glance, know the level of material in your bin.





Remains black when material is below indicator



Rotates to yellow when material is at or above indicator.



REQUEST A QUOTE





TOP BENEFITS

Stay Safe

Know your bin levels from the ground. Avoid climbing dangerous bin adders and stairs



Highly Visible

IMPORTANT FEATURES

Premium 3m reflective indicator easily visible day or night from over 300 feet.



No Electricity Needed

Completely mechanical operation. Automatically resets.

(
(

Easy Installation

Install our bin level indicators in under 5 minutes from the outside of the bin.



Planning Aid

Install indicators to provide a signal on when to stop filling, order product, turn on a motor, etc.



Dependable

You can trust our bin level indicators to work all of the time, in even the harshest of conditions. 5 YEAR WARRANTY!

PREMIUM MATERIALS




Corrosion resistant, UV stable, high strength plastic components. *Won't fade or crack and lens won't yellow!*




(4)

6

Moisture-proof bin seal. Seals indicator to the bin!



Hermetically sealed lens to body. *No condensation.*



Wear resistant Teflon coated fabric used for the activator. *Reduces abrasion and provides years of problem-free use!*

MYSILO by 🌑 SILOŞMA








COMMON BIN TYPES








Overhead Bins

Feed Bins

Seed Bins



Industrial Bins



Corrugated or Smooth

POPULAR USES













Sand



BEST SELLER!

Grains

Seeds

Powders

Fertiliser

Plastic Pellets

Salt

LEVALERT MODEL 9700

Feeds

PRODUCT HIGHLIGHTS	 Extra large indicator for high visibility Activator frame stays tight to bin wall. Ideal for high shear load applications and use with grain spreaders. 5" or 7" activator width 				
	PART NUMBER	WEIGHT RANGE	GREAT FOR		
LEVALERT OPTIONS	9700-7 7" activator width	10-55lbs. / cubic foot tolerance	Corn, oats, sunflowers, grou feeds, grass seeds	0	
	9700-5 5" activator width	55-100lbs. / cubic foot tolerance	Fertilizer, sand, salt, cement powders		
	\cdot Installs on outside of bin, corrugated or flat wall bin styles up to 3/8" in thickness				
9700 SPECS	 Operates effectively at temperatures between +180F (82C) to -30F (-35C) Pat. 10,408,659, Pat. 10,557,740, Pat. D848,874 5 year warranty on Bin Level Indicators 				

OPTIONAL MICRO-SWITCH

MYSILO 🗤 🛞 SILOŞ

Expand the Indicator's	ITEM ID	DESCRIPTION		TECHNICAL SPECIFICATIONS
capabilities by per- forming an electrical operation.	A91	Micro-Switch Only	AC/DC, contains both NO/NC	SPDT. Rated voltage: 125 VAC 3A, 250 VAC 2A, 30 VDC 3A.
Simply add the optional Micro-Switch to turn off and on motors or lights, sound a horn or alarm, etc.		Chily	circuitry	Cable length: 12" (304mm) Approved Safety Standards: UL (UL1054)/ CSA (CSA C22.2 No.55). RoSH Compliant.
	A92 (AC or DC)	Micro-Switch/ Relay Kit	Switch plus AC-120 relay	



LevALERT Indicator Model 9700



Grain Bin Monitoring Easy to Use Grain Monitoring Equipment Designed for Safety Equipment: *the mechanics*

& Efficiency

Rati acillabo. Rem eos maximus mi, od quates id que resed mi, ommo doluptas milicitat andita natiumet offictur sam experi conse pe pernam fugiat ea pariate labores ectibus re ped event.

Picaboribus ressequibus eium fugitat incium volendi tioreperios arum, sandunto et, sam que venis ea sum esed que exceaquid moloratem faceper iaturios dolectam ut aut ipsae prem doloressin exerita sanimo esequi dusapel moluptatquo vellabo restem. Ipsantiae nus nus, aute dollecatem hite la dictis sam que venis

are simple

Picaboribus ressequibus eium fugitat incium volendi tioreperios arum, sandunto et, ea sum esed que exceaquid moloratem faceper iaturios dolectam ut aut ipsae prem doloressin exerita sanimo esequi dusapel moluptatquo vellabo restem. Ipsantiae nus nus, aute dollecatem hite la dictis sam que venis


Typical uses include:

Agricultural Grains and Feeds Fertilizers | Minerals | Sand | Pellets Granular Chemicals | Powders

BLACK is "OFF" (Deactivated) YELLOW is "ON" (Activated)

Upper Levels

Mid-Point Levels

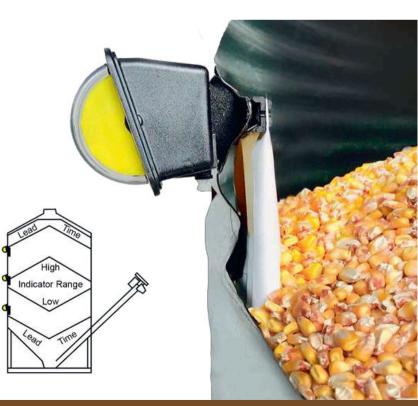

REQUEST A QUOTE